

Engineering e-Transaction (ISSN 1823-6379)
Vol. 5, No. 2, December 2010, pp 97-109
Online at <http://ejum.fsktm.um.edu.my>
Received 7 October, 2010; Accepted 26 November, 2010

DEGRADATION STUDIES OF AMINES AND ALKANOLAMINES DURING CO₂ ABSORPTION AND STRIPPING SYSTEM

M. S. Islam, R. Yusoff and B. S. Ali
Department of Chemical Engineering,
Faculty of Engineering, University of Malaya,
50603 Kuala Lumpur, Malaysia
Email: sakinulislam@yahoo.com

ABSTRACT

Aqueous solutions of alkanolamines are widely used for the removal of impurities such as hydrogen sulfide (H₂S), carbon dioxide (CO₂), carbonyl sulfide (COS) and carbon disulfide (CS₂) from natural, refinery and manufactured gases. In spite of the resistance of alkanolamines to chemical breakdown, plant and laboratory reports indicate that, on prolonged use, alkanolamines may be transformed into undesirable products from which the amines are not easily recovered. This phenomenon, commonly referred to as 'amine degradation', not only leads to amine losses, but may also contribute to operational problems such as foaming, corrosion, high solution viscosity and fouling as a result of decreasing the plant life. Amine based gas purification plants having absorption and stripping system, solvents are degraded at these two units mainly by oxidative degradation at absorber condition and thermal degradation at stripper condition. Identification of amine degradation routes, remediation of degradation, types of degradation products and studies on degradation reaction mechanism becomes essential for successful plant operation. Gas chromatography-mass spectrometry (GC-MS), Ion chromatograph (IC), High performance liquid chromatography (HPLC), Nuclear magnetic resonance spectroscopy (NMR) and Fourier transform infrared absorption spectrometry (FT-IR) are extensively used to identify the various degradation products. A comprehensive review of the latest research activities on alkanolamines degradation, best method for identification, various properties of degradation products and their classification is presented in this paper. This study would help to develop better understanding of amine degradation.

Keywords: Degradation; Alkanolamines; Absorption; Stripping; Natural Gas.

1. INTRODUCTION

Natural and refinery gases typically contain acid gases in concentrations ranging from a few parts per million to tens of volume percent. The major acid gases are hydrogen sulfide (H₂S) and carbon dioxide (CO₂). Because of the corrosivity of acidic gases in the presence of water, the toxicity of H₂S, and the lack of heating value of CO₂, NG or LPG must be purified prior to liquification and use. Amines and alkanolamines are widely used in natural gas refining for the sweetening of sour gas by removing CO₂ and H₂S. In the amine based purification plant alkanolamines of primary significance include monoethanolamine (MEA), diethanolamine (DEA), methyldiethanolamine (MDEA), di-2-propanolamine (DIPA), and diglycolamine (DGA). For the last two decades the sterically hindered amine such as AMP (2-amino-2-methyl-1-propanol) has been suggested as an attractive solvent for the removal of acid gases. The advantages of AMP includes high equilibrium loading capacity (Davis and Gary Rochelle, 2009). Aqueous MDEA solution is used as a solvent for selectively absorbing H₂S (Lepaumiera *et al.*, 2009; Blauwhoff *et al.*, 1984; Closmann, 2009; Klare *et al.*, 2000; Shahi *et al.*, 1994; Lepaumier *et al.*, 2009a). However, in removing acid gases with alkanolamines and regenerating them, undesirable compounds are likely to be produced by the irreversible transformation of alkanolamines, which is called degradation. Degradation causes a loss of alkanolamine, and it may also contribute to operational problems such as foaming, corrosion and fouling. While some loss is expected in all operations,

extreme losses can negatively impact economics of operating any amine unit. Degraded DEA solutions usually contain hydroxyethyl oxazolidone (HEOD) bis (hydroxyethyl) piperazine (BHEP), and tris-(hydroxyethyl) ethtlendiamine (THEED), together with low concentrations of various higher boiling compounds (Dawodu and Meisen, 1996, 1993; Shahi *et al.*, 1994; Choy and Meisen, 1980; Dawodu and Meisen, 1991). The degraded solution of MDEA or MDEA/PZ contains EG, DEA, TEA, DMAE, HMP, BHEP, MP and DMP (Lepaumier *et al.*, 2009a; Lepaumier *et al.*, 2009c, b; Oh *et al.*, 2003; Amiri *et al.*, 2007; Carlson *et al.*, 2001; Haws and Jenkins, 2000). Literature cited sufficient information on MEA degradation products including volatile and solid substances. It contains more than 15 different degradation products identified by many researchers (Strazisar *et al.*, 2003; Supap *et al.*, 2006; Lepaumier *et al.*, 2009c, b; Sexton and Rochelle, 2009; Davis, 2009; Sexton and Rochelle, 2010; Strazisar *et al.*, 2010; Haws, 2010). Haws *ibid* noted that the degraded solution of DGA contains BHEEU and BHEETU, DIPA contains HMPO (Haws, 2010). In addition to these impurities, resulting from acid gas induced amine degradation, industrial amine solutions frequently contain other contaminants such as suspended solids, dissolved hydrocarbons, sodium and chloride ions, iron sulfide, foam suppressants, corrosion inhibitors and heat stable salts. The accumulation of contaminants in amine solutions creates major operational problems including degradation (Lepaumier *et al.*, 2009a), foaming (Thitakamol *et al.*, 2009; Pauley and Reza Hashemi, 1998; Amiri *et al.*, 2007), fouling (Axel Meisen and Abdi, 2010), corrosion (Dawodu and A. Meisen, 1996), a reduction in active amine content also causes an increase in solution viscosity. The chemical and physical nature of the contaminants makes the development of purification schemes inherently difficult. In this paper an overview of the degradation process of amines solvents, degradation reaction mechanism, impact of degradation products and methodology of DGP identification will be discussed for a better understanding of amine and alkanolamine based absorption and stripping systems.

2. AMINE BASED ABSORPTION AND STRIPPING SYSTEM

For over seventy years the alkanolamine process has been considered the best approach in removing H_2S and CO_2 for the purpose of purification and separation. It is based on the reaction between weak acid (H_2S and/or CO_2) and weak base (alkanolamines) to give a water soluble amine acid gas salt. An amine based natural gas sweetening plant was configured with absorber and regenerator. The temperature range is 40-60°C and 100-120°C at the absorber and the stripper respectively. The sweet gas obtained from the absorber alternatively exhausts sour gas components at the stripper. The following Fig.1 represents a sweetening process of sour gas.


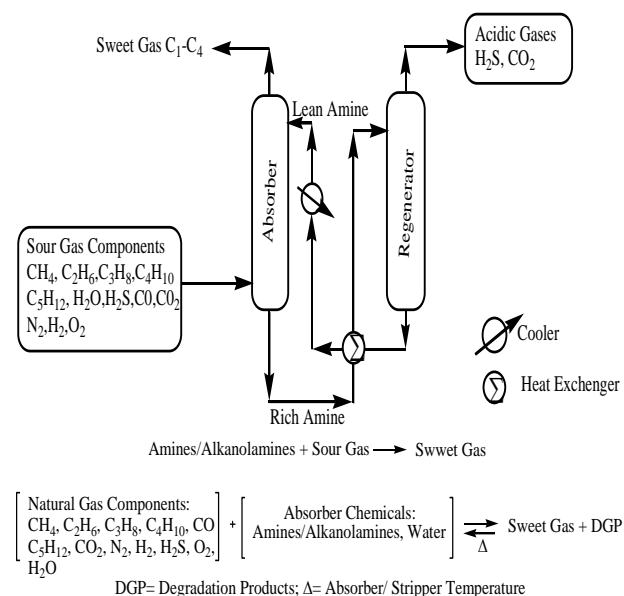


Fig. 1 Sour gas sweetening process

Mainly amine solvents are used as absorbents in the absorber for sweetening natural gas and for prolong use of this solvent that is transferred to the stripper by means of regenerating absorbed gases. Absorption and desorption are the common process in these two units occurring continuously during the circulation of amine solvent. Natural gas containing several acidic oxides are very harmful for environment and plant operation and for this reason these are removed prior to use. Sour gases react with amine solvent during absorption-desorption


cycles gradually at higher and lower temperature and some of these reactions are given by Eqs. (1)-(11) to show how the DGP is formed (Haws, 2010)?

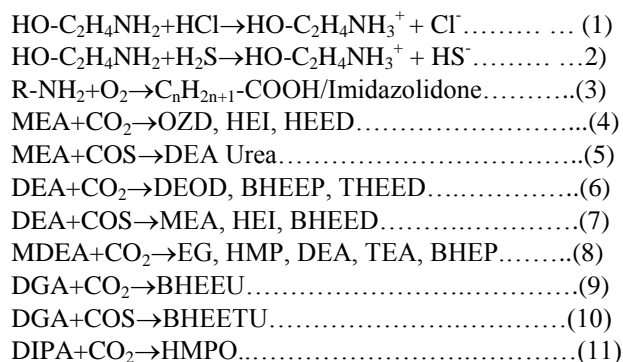


This absorption reactions cause a lot of solvent degradation with various difficulties and as a result the remediation of this problem has become a major focus of interest for the last few decades. Large numbers of articles have been published in the field of degradation in the last three decades. The prevention of amine loss, amine degradation is one of the conditions for successful plant operation and also the key to economic benefits. Hence it is very important to identify the route of amine degradation.

3. CHEMISTRY OF AMINE DEGRADATION


The basic chemistry of degradation of alkanolamine is explained in the open literature (Wenten, 2010) and these are given by Eqs. (12)-(16). In the following chemical reaction it is clear that amines occur due to the protonation and carbamate formation reaction brought about by the hydrolysis of water and acids.

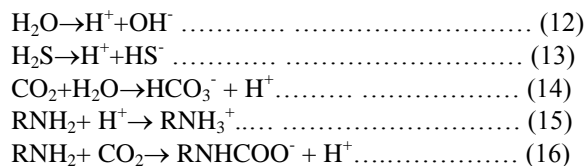

The same reaction is also explained in the literature (Dawodu and Meisen, 1996; Choy and Meisen, 1980; Dawodu and Axel Meisen, 1994) for DEA degradation. These reactions are given by Eqs. (17)-(20). Hydrogen sulfide emitted hydrogen ion (Eq. 17) in water and carbon dioxide as well as carbonyl sulfide and produces COS and H₂S respectively (Eq. 18). This reaction causes additional reactions with DEA molecule.

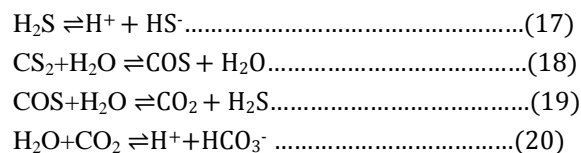


DEA molecule directly reacts with CS₂ and successively produces DEA thiocarbamate salt (Eq. 21 & 22). On the other hand it produces carbamate with CO₂ (Eq. 24). DEA carbamate reacts with MEA and DEA and forms BHEED and THEED respectively. These two DGP further form BHEI and BHEP with CO₂ respectively. HEOD is one of the familiar DGP of DEA and this is also from DEA carbamate. Protonated DEA molecule reacts with CO₂ and converts into MEA, ethanol and water. The formation of MEA is better for DEA system. However there is insufficient information in this connection in the open literature. Ethanol can easily degrade to aldehyde and then an acid. This acid forms various acetate and ester compounds in amine system. An over view of the reaction pathways of DEA are mentioned below.

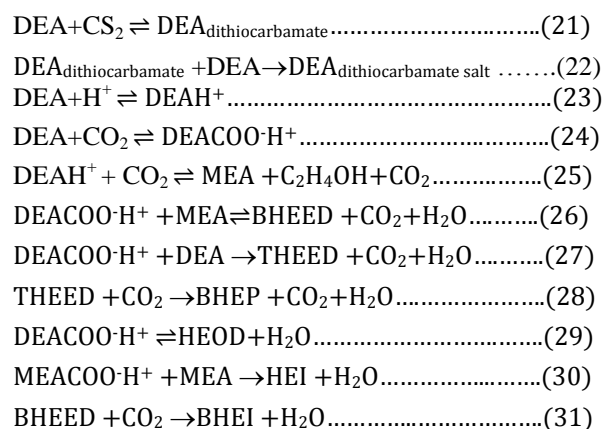


4. CAUSES OF AMINE DEGRADATION

Amines and alkanolamines can be degraded in many ways. During the absorption process amines and alkanolamine are used for removing acidic oxide for as example CO, CS₂, CO₂, COS and H₂S. Water is the most widely used solvent for making amine solution, as this makeup water is the one of the causes of amine degradation. Based on the existing studies the causes of amine degradation are as follows. This extracted information would help to develop our research knowledge.

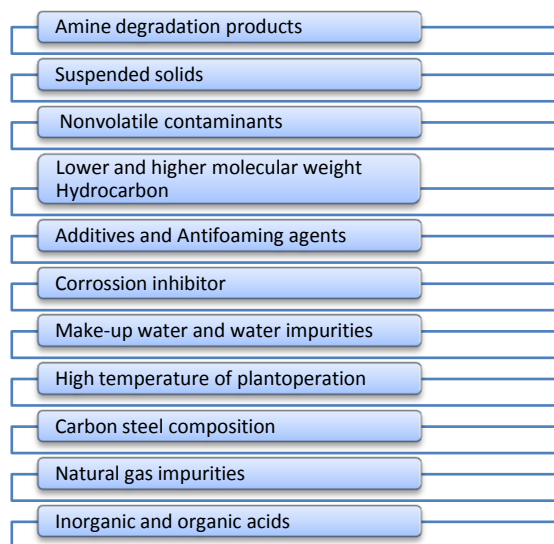

5. EFFECT OF DEGRADATION PRODUCTS

Degradation is the undesirable phenomenon in the replacement of acidic oxides absorption. It is considered that degradation products are major problems during the plant operation. The foaming behavior of degradation products was conducted by Thitakamol and Veawab (Thitakamol *et al.*, 2009; Thitakamol and Veawab, 2008) and (Goff and Rochelle, 2006). Corrosion behavior of degradation products were conducted by Dawodu and Meisen (Dawodu and A. Meisen, 1996) and also conducted by the following researchers (Franco *et al.*, 2009; Bedella, 2009; Eide-Haugmo *et al.*, 2009). The recent paper (Bedella, 2009) pointed out several problems which occurred due to irreversible degradation reaction.

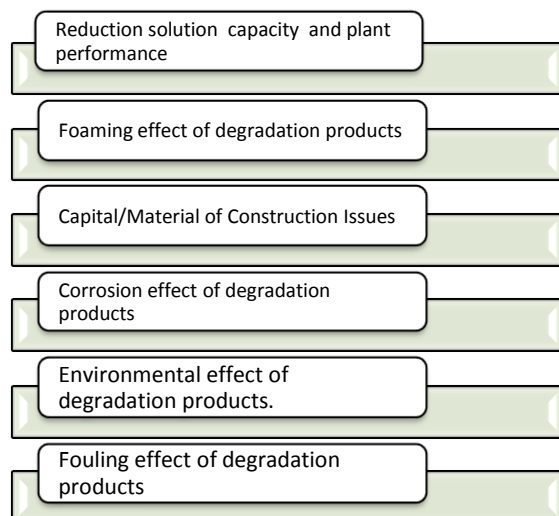

Most of the degradation products and corrosion inhibitors in aqueous MEA solutions enhance foaminess coefficient. At the same time the physical properties, namely surface tension, density and viscosity of solution, play a significant role in foaming tendency through foam formation and foam stability. Among physical properties, the foam height is the most sensitive to liquid viscosity followed by liquid density and surface tension, but not sensitive to gas density. A typical view of the foam formation is shown in the Figures 2 and 3.

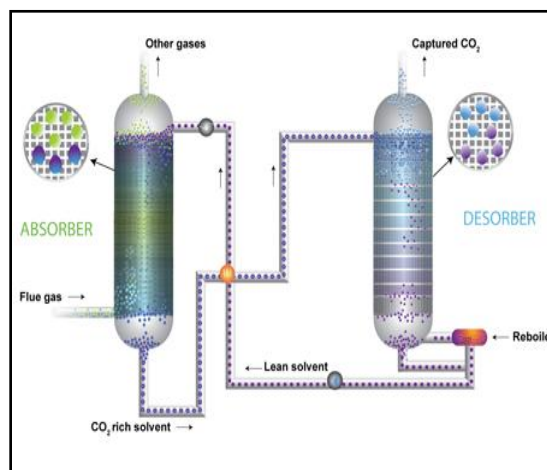


Fig. 2 Foam formations in the interior of the stripper by degradation products (CRC, 2010).

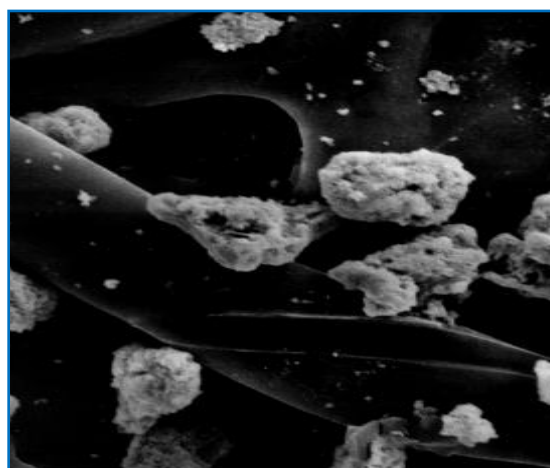


Fig. 3 Foam formations by degradation products (Pauley and Reza Hashemi, 1998)

Depending on the type of impurities, two major problems may arise i.e. (a) The replacement cost of amine for an MEA system was shown by Saxena to be about 4% of the total cost of CO₂ sequestration. It should also be

realized that solvents which are more expensive than MEA may have lower degradation rates or may reduce other cost factors such as energy or capital (b) Increased viscosity caused by degradation could increase the costs associated with solvent pumping. On the other hand acidic degradation products may be more corrosive and some diamines produced may act as chelants to remove protective films from metal surfaces. Such corrosivity could necessitate more expensive construction materials. In the amine based NG gas purification industry many operational problems occurred including economical and environmental impact during this process. Acidic degradation products may also occur in this industry and as a result may also corrode pipelines. A typical view of crevice and pitting corrosion in industry is shown in Fig: 04 and 05.



Fig. 4 Crevice corrosion in the junction of pipelines (CTL, 2010)

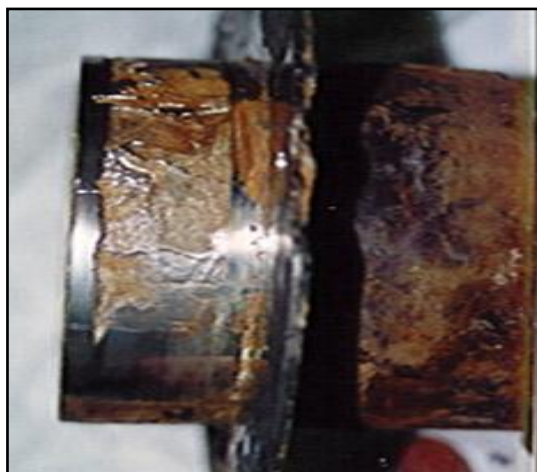


Fig. 5 Pitting corrosion occurring at the end of the pipe junction (Internet, 2010b).

All amines and alkanolamines and also their degradation products are not environmentally friendly. Eide-Haugmo conducted researches on the biodegradability and environmental effect of more than forty amines including alkanolamines like MEA, DEA, MDEA, AMP etc (Eide-Haugmo *et al.*, 2009). Effect of degradation products on membrane gas absorption process conducted by Franco, noted that the presence of oxalic acid reduced the mass transfer rate of CO_2 in MEA and most significantly followed by formic acid as well as acetic acid (Franco *et al.*, 2009). Amine based purification plant emitted a lot of toxic volatile products which are very harmful for living organisms. Hence considering all sides we should think about the environmental effect of degradation products and also further research in this area. Most of the articles highlighted the greenhouse effect of sour gases but not on all volatile degradation products. Formation of solid products and solid heat stable salts may create fouling deposits in piping, heat exchangers and reboilers (Fig: 6).



Fig. 6 Fouling effect in the pipe line of gas sweetening plant (ARIANA, 2010; Internet, 2010a, 2009).

As a result, pressure drops will rise and the heat-transfer coefficient will fall, leading to increased overall energy costs for the plants. Cleaning of piping, heat exchangers and other infected areas is also expensive. It is therefore advisable to provide effective filtration to remove any solids that may be present.

6. AN OVERVIEW OF THE DEGRADATION OF ALKANOLAMINES

Amine based absorption and stripping system with aqueous amine solution offers a competitive approach for capturing CO_2 from raw natural gas and coal-fired power

plant flue gas. Carbon dioxide removal from flue gas is important to reduce greenhouse effect. CO₂ absorption with reversible chemical reaction using aqueous alkanolamines solution is currently the most appropriate method for low pressure CO₂ sources. In the last decades, alkanolamines have acquired a well established position in gas-treating for the removal of the acidic components H₂S and CO₂. Industrially important alkanolamines are MEA, DEA, DIPA and MDEA. Among all known solvents, MEA is the benchmark molecule because of its properties towards CO₂ capture (low price, high water solubility, high absorption capacity and fast kinetic). However, a major problem associated with chemical absorption using alkanolamines is degradation through irreversible side reactions with CO₂, H₂S and O₂ which leads to numerous problems with the process: solvent loss, foaming, fouling, increased viscosity and corrosion. So, the degradation studies of alkanolamines are become very important for successful plant operation.


6.1 Degradation study of MEA and MEA Blends

Amine based absorption and stripping system with aqueous amine solution offers a competitive approach for capturing CO₂ from raw natural gas and coal-fired power plant flue gas. Among these amine solutions MEA is considered the base line solvent for this application (Hilliard 2008; Aron and Tsouris, 2005). For this consideration aqueous monoethanolamine (MEA) is used extensively to remove CO₂ from flue gas

6.1.1 Degradation Route of MEA

In power plant flue gas stream, that contains 5-10% O₂, 10% CO₂; three types of degradation can occur. MEA degrades in the presence of O₂ and CO₂, resulting in extensive amine loss and equipment corrosion as well as generating environmental impacts. This reaction produces high molecular weight degradation products and is expected to occur at the higher temperature region of the stripper. This reaction mechanism is different from Lepaumier's studies (Lepaumier *et al.*, 2009a; Lepaumier *et al.*, 2009c, b) because there is a difference in their results with reference to polymeric and oligomer degradation product. Oligomer is formed from O₂/CO₂

induced degradation of MEA which was shown by Lepaumier (Lepaumier *et al.*, 2009a; Lepaumier *et al.*, 2009c, b). On the other hand F. Closmann (Closmann, 2009) talked about the formation of polymeric products. From this point it has created divergent views on the formation of either polymer or oligomer. The degradation pathways of MEA are explained in the literature (Strazisar *et al.*, 2003; Goff and Rochelle, 2004; Lepaumier *et al.*, 2009a; Lepaumier *et al.*, 2009c, b; Abdi, 1997; Lawal *et al.*, 2005a; Strazisar *et al.*, 2010) for protonation reaction, polymerization reaction, isomerization reaction and miscellaneous route regarding reactions. The CO₂ induced degradation of MEA given below.

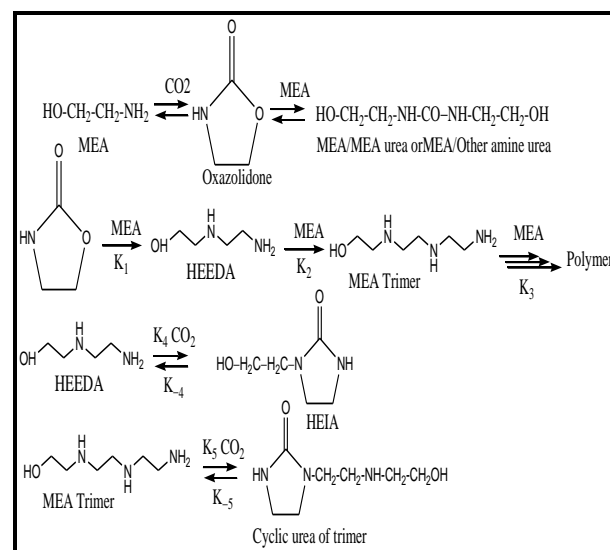

Effectively to prevent MEA degradation, a degradation prevention strategy needs to be formulated, and this requires knowledge of the degradation products, stoichiometry, mechanism, and kinetics of the degradation process as a function of the various operating variables (Bello and Idem, 2006).

6.1.2 Degradation products of MEA

MEA is very reactive solvent for gas absorption process as a result it shows high reaction rate with any components and form much DGP. The major problem is that the regeneration energy of MEA degradation products is high. The miscellaneous degradation products and their chemical formula are given in Table-01 and Table-02.

Table 1 Degradation products of MEA induced by CO₂ (Strazisar *et al.*, 2003).

| No | Compound name and formula |
|----|---|
| 1 | <i>N</i> -formylethanolamine (C ₃ H ₇ NO ₂) |
| 2 | <i>N</i> -acetyethanolamine (C ₄ H ₉ NO ₂) |
| 3 | 2-oxazolidone (C ₃ H ₅ NO ₂) |
| 4 | <i>N</i> -(hydroxyethyl)-succinimide (C ₆ H ₉ NO ₃) |
| 5 | <i>N</i> -(2-hydroxyethyl)-lanthamide (C ₅ H ₁₁ NO ₃) |
| 6 | 1-hydroxyethyl-3-homopiperazine (C ₇ H ₁₄ N ₂ O ₂) |
| 7 | 1-(2-hydroxyethyl)-2-imidazolidinone (C ₅ H ₁₀ N ₂ O ₂) |
| 8 | 1-hydroxyethyl-2-piperazinone (C ₆ H ₁₂ N ₂ O ₂) |
| 9 | 4-hydroxyethyl-2-piperizinone (C ₆ H ₁₂ N ₂ O ₂) |
| 10 | 3-hydroxyethylamino- <i>N</i> -hydroxy-ethylpropanamide (C ₇ H ₁₆ N ₂ O ₃) |
| 11 | 2-hydroxyethylamino- <i>N</i> -hydroxyethylacetamide (C ₆ H ₁₄ N ₂ O ₃) |
| 12 | Ammonia (NH ₃) |
| 13 | Acetic acid (C ₂ H ₄ O ₂) |
| 14 | Propionic acid (C ₃ H ₆ O ₂) |
| 15 | <i>n</i> -butyric acid (C ₄ H ₈ O ₂) |
| 16 | Monoethanolamine (C ₂ H ₇ NO) |
| 17 | 2,6-dimethyl-4-pyridinamine (C ₇ H ₁₀ N ₂) |
| 18 | 2-imidazolecarboxaldehyde (C ₄ H ₄ N ₂ O) |
| 19 | 1-methyl-2-imidazolecarboxaldehyde (C ₅ H ₆ N ₂ O) |

6.2 Degradation of DEA and its blends

Diethanolamine (DEA) is an important alkanolamine successfully used within the 25–35 wt% range in natural gas sweetening plant for sour gas absorption. Degradation study of DEA with CO₂ to form various byproducts has been demonstrated as early as 1956. There is a lot of information of DEA and its blends which are also reported in the literature (Lepaumier *et al.*, 2009a; Blauwhoff *et al.*, 1984; Klare *et al.*, 2000; Dawodu and Meisen, 1996; Shahi *et al.*, 1994; Choy and Meisen, 1980; Dawodu and Meisen, 1991, 1992; Kennard M. and Axel Meisen, 1983; Lepaumier *et al.*, 2009c, b). DEA/MDEA and DEA/AMP also have an experience of sour gas absorption. The first blends MDEA/DEA have been used successfully in a wide variety of natural gas sweetening applications for 20 years. In 1956, Poldermann and Steele discovered the following reaction mechanism [Fig: 7 and 8] during DEA/CO₂ degradation (Dupart *et al.*, 1999).


Table 2 Degradation products of MEA induced by CO₂ and O₂ (Supap *et al.*, 2006)

| | |
|---------------------------|--|
| Major DGP were identified | 1-methylazetidine; D,L-homoserine lactone; Imidazole; <i>N</i> -(2-hydroxyethyl)acetamide; <i>N</i> -methyl formamide; 1,3-dioxane; 2-ethyl-1H-imidazole; 5-hydrazinocarbonyl-1H-imidazole; Uracil; <i>N</i> -(2-hydroxyethyl)succinimide; 1-amino-4-methylpiperazine; 2-pyrrolidinone; 1-methyl-4-imidazole-5-carboxylic acid; <i>N</i> -methylene ethanamine; 5-aminovaleric acid; D,L-aspartic acid; 2-[(2-aminoethyl)amino] ethanol; Ethylamine; 4,5dimethyloxazole; 18-crown-6; Ethylurea; <i>N</i> -glycylglycine dimethylhydrazone-2-propanone; 1-(2-hydroxyethyl)-2-imidazolidinone |
| Additional Products Found | Ammonia; Formic acid; Acetic acid; Pyrimidine; Acetamide; 2-methylaminoethanol; Acetaldehyde; Ethanol |
| Other Compounds | Oxalic acid; Glycolic acid; Bicine |

6.2.1 Degradation reaction of DEA and DEA blend

A model was developed by Kennard (1983) to explain the formation of the main degradation products. Figure-7 and Fig-8 shows the major reactions which are believed to be responsible for the degradation of DEA by CO₂. Certain reaction steps cannot be fully confirmed since they are based on the existence of DEA carbamate. Unfortunately, it was impossible to isolate and identify the carbamate, and certain aspects of the reaction mechanism therefore they remain conjectural. In general,

the DEA degrades via three routes: the fast “molecular route”, the slower “ionic route”, and the very slow “thermal route”. The molecular route involves CO₂ reacting directly with DEA to produce the carbamate, whereas the ionic route produces the carbamate from the amine salt R₂NH²⁺ - HCO₃⁻. The carbamate then degrades slowly to produce THEED, which in turn loses water to form BHEP. HEOD is a side product, produced by internal dehydration of the carbamate and it is believed that the formation of HEOD does not contribute to the overall degradation of DEA. CO₂ appears to catalyze the degradation of DEA to THEED and of THEED to BHEP via the formation of carbamate complexes (Dupart *et al.*, 1999).

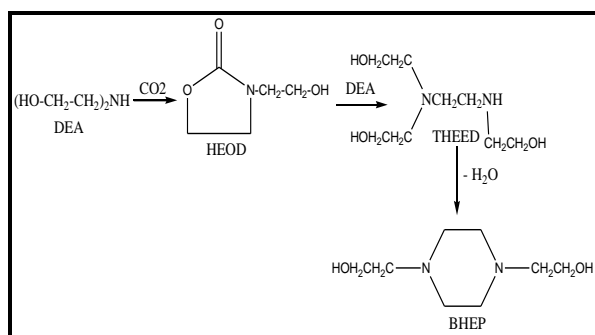

6.2.2 Degradation products of DEA and DEA blend

Since DEA is a secondary alkanolamine, it has a reduced affinity to reaction with H₂S and CO₂. There are many degradation products which are formed, induced by several gases which are mentioned in Table-03. The degradation products of DEA are relatively low corrosive than those of MEA. Exposure to oxygen forms corrosive acids and on the other hand COS and CS₂ induced degradation of DEA produced relatively low corrosive products than O₂. DEA is not reclaimable under regenerator conditions (Meisen and Abdi, 2010); it decomposes below its boiling point at atmospheric pressure. Vacuum reclaimers, however, have been successfully used to reclaim DEA solutions (Meisen, 1996).

6.3 Degradation of MDEA and its blends

Among the all alkanolamines, MDEA as an absorption solvent of acid gases is widely used today because it


Table 3 Degradation products of DEA induced by CS₂ (Dawodu and Meisen, 1996).

| Symbol | Name | Formula |
|---------|---|---|
| MEA | Monoethanolamine | C ₂ H ₇ NO |
| AMP | Aminomethyl propanol | C ₄ H ₁₁ NO |
| DGA | Diglycolamine | C ₄ H ₁₁ NO ₂ |
| HEP | Hydroxyethyl piperazine | C ₆ H ₁₄ N ₂ O |
| BHEED | N,N'-Bis(hydroxyethyl)-ethylenediamine | C ₆ H ₁₆ N ₂ O ₂ |
| DIPA | Di isopropanolamine | C ₆ H ₁₅ NO ₂ |
| DEA | Diethanolamine | C ₄ H ₁₁ NO ₂ |
| BHEP | N,N'-Bis(hydroxyethyl)-piperazine | C ₈ H ₁₈ N ₂ O ₂ |
| BHEED | N,N'-Bis(hydroxyethyl)-ethylenediamine | C ₆ H ₁₆ N ₂ O ₂ |
| HEOD | Hydroxyethyl-oxazolidone | C ₅ H ₉ NO ₃ |
| HEI | Hydroxyethyl-imidazolidone | C ₆ H ₁₁ NO ₂ |
| THEED | N,N,N'-Tris(hydroxyethyl)-ethylenediamine | C ₈ H ₂₀ N ₂ O ₃ |
| BHEI | N,N'-Bis(hydroxyethyl)-imidazolidone | C ₇ H ₁₄ N ₂ O ₃ |
| DEAC | Diethanolamine carbamat | C ₅ H ₁₂ NO ₄ |
| MEAC | Monoethanolamine carbamat | C ₃ H ₈ NO ₃ |
| DEADTC | Diethanolamine dithiocarbamate | C ₅ H ₁₁ NS ₂ |
| DEADTCS | Diethanolamine dithiocarbamate salt | C ₉ H ₂₂ N ₂ O ₄ S ₂ |
| AEEA | Aminoethylethanol amine | C ₄ H ₁₂ N ₂ O |

possesses the characteristics such as higher H₂S selectivity, bigger absorption capacity, lower regeneration energy, smaller hot-degradation and low corrosion (Weiland *et al.*, 2003). Many articles (Closmann *et al.*, 2009; Klare *et al.*, 2000; Shahi *et al.*, 1994; Lepaumier *et al.*, 2009c; Lawal *et al.*, 2005b) were reported on the MDEA degradation induced by CO₂/O₂, CO₂/H₂S and CO₂ respectively. MDEA is a tertiary amine and commonly used in the 20–50 wt% range.

6.3.1 Degradation reaction of MDEA and MDEA blend

MDEA does not have a hydrogen atom attached to the nitrogen and cannot react directly with CO₂ to form carbamate. The CO₂ reaction can only occur after the CO₂ dissolves in water to form a bicarbonate radical, which then undergoes an acid-base reaction with the amine. At least six mechanisms for the CO₂-MDEA reaction have been proposed by Cornelissen (1982), Barth et al (1981) and Danckwerts (1979). MDEA can, however, react with H₂S by the same proton transfer mechanism of primary and secondary amines (Jou et al, 1982). There is a one CO₂ induced degradation of PZ and MDEA explained by Closmann (2009) and are presented in the following reaction mechanism.

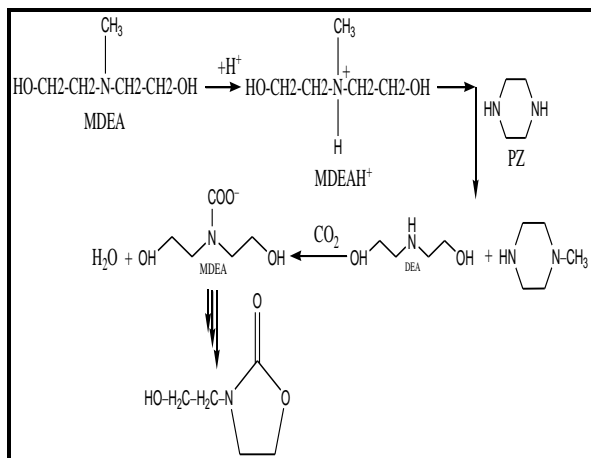








6.3.2 Degradation products of MDEA and MDEA blend

While MDEA was initially thought of as non degradable, recently it has been shown in many articles that it will often degrade in TGTU services, and efforts are being reflected on improved reclaiming options for solvent quality control. MDEA molecule degraded into HSS, DEA, MMEA and bicine. Bis-(hydroxyethyl)glycine (Bicine) is a degradation product formed in the presence of DEA and unstable chemical intermediates. It is considered as a corrosive DGP and may be removed by vacuum distillation. It has been shown that ion exchange is not very effective in removing this compound since it is either dipolar or a zwitterions (essentially meaning it may behave as an anion or a cation depending on the pH of the solution). Monomethylethanolamine (MMEA) is one of the simpler amines that may be formed from

MDEA degradation, since MMEA is a secondary amine, it will react directly with CO₂ and will begin to affect the performance of the MDEA solvent. Diethanolamine (DEA) is also one of the simpler secondary amines that may be formed from MDEA. Since DEA is a secondary amine, it will react directly with CO₂ and will begin to affect the performance of the MDEA solvent.

6.4 Degradation of miscellaneous amines

In the revolution of engineering science piperazine (PZ) has become a most familiar chemical in purification and in the separation process. Hence aqueous PZ has been investigated as a novel amine solvent for carbon dioxide absorption (Freeman *et al.*, 2010). PZ is a cyclic aliphatic diamine containing two substituted hydrogen atoms in its molecular structure specifically in the first and fourth positions. This H-atom is capable of reacting with other components and as a result is degraded by contaminants. The absorption reaction of MDEA/PZ is explained by R. Lensen (Lensen, 2004) which given below.



7. SOLVENT BLENDS

Since the mid-nineteen eighties, in order to further improve absorption performance of MDEA solvent, blended alkanolamine solvents have been developed by adding another alkanolamine into MDEA. These blended solvents include MDEA-MEA, MDEA-DEA, MDEA-DIPA, MDEA-DGA, and MDEA-AMP, etc. (Pacheco *et al.*, 2000; Mandal *et al.*, 2001; Xia *et al.*, 2003; Rinker, 1997). The blended solvents have the compatibility of advantages of single solvent in blended solvents (Aroonwilas and Veawab, 2004). example, a

blended solvent, which consists of a mixture of primary or secondary amine with MDEA, combines the higher CO₂ reaction rates of the primary or secondary amine with the higher CO₂ loading capacity of the MDEA. Thus, the blended solvent providing both higher CO₂ reaction rate and higher CO₂ equilibrium capacity may result in substantial lower solvent circulation rates compared to a single solvent. So the development of a new solvent for maximum CO₂ absorption can be considered as a great invention of sour gas sweetening process. A large number amount of experimental work (Dawodu and A. Meisen, 1996; Dawodu and Axel Meisen, 1994; Lawal and Idem, 2006; Davis, 2009; Sexton and Rochelle, 2010; Lawal *et al.*, 2005a; Oh *et al.*, 2003) has been done over the past few years to characterize new solvents with respect to different properties (solubility, absorption, capacity, amine volatility, etc.). Amines and alkanolamines are among several solvents that have been investigated and current research is focus on designing a chemically stable, less corrosive solvent with fast reaction rates and low heats of absorption to minimize energy requirements for the regeneration of the solvent. Recently, most of the scientists have shown an increased interest in the use of mixed amine solvents in gas-treating processes. Blends comprising of primary, secondary, or tertiary amines have been suggested for the industrial gas sweetening processes (Abdi *et al.*, 2005). Some new amine blends (TBEE, APM, DIPATBG, and TBE) have been focused upon as having no sufficient reports. Hence we should continue to get information on it about degradation, modeling, design, absorption, adsorption, kinetics, mechanism and various comparative sweetening capacities. It was also mentioned that there are no aromatic amines or unsaturated aliphatic or aromatic amines in open literature for degradation study including CO₂ capture technology. These amines have better absorption capacity with better resistance to degradation.

8. RECOMMENDATION FOR FUTURE WORK

The author would like to recommend working with three component amine (aliphatic and aromatic) blends for decreasing degradation, amine losses, corrosion and miscellaneous side reaction. Many researches and experiments were conducted on degradation but there is no paper on heterocyclic aliphatic and heterocyclic

aromatic amines. The author also predicted that this amine also has the best thermal stability and resistance to degradation properties. Another important factor is heat of formation ΔH_f of degradation product. If we know these parameters then it will be easy to understand its formation. The enthalpy of degradation and dissociation constant were found in open literature except ionization potential. So to form the degradation product all solvents or amines at first must be ionized and only then new products are formed. Therefore we have to take this information into consideration and implement accordingly. PZ has become an ideal solvent because it has two amine functional groups in its structure so the author recommends working with higher molecular weight polyamine (cyclic and straight) compounds.

9. CONCLUSIONS

Amine degradation is an ongoing research area till date, as there are many unknown areas to be discovered. Recovery techniques are still being developed to improve recovery efficiencies, reduce environmental impacts and operating problems of the reclaiming units. The above mentioned contents of this review paper highlighted very important and recent information regarding alkanolamines degradation, degradation path ways, degradation products, effect of degradation.

ACKNOWLEDGEMENT

The authors would like to acknowledge Ministry of Science, Technology and Innovation (MOSTI), Malaysia, for the project: RG003/09AET and the University of Malaya for the financial support and for providing us with an excellent research environment.

REFERENCES

- Abdi, M.A. 1997. Purification of partially degraded diethanolamine solutions, *PhD thesis, University of British Columbia, Canada*.
- Abdi, M.A., Khakdaman, H.R. and Zoghi, A.T. 2005. predicting amine blend Performance,
- Amiri, A.P., ASL, A.H., Ehsani, 2007. Alkanolamines Foaming Tendency: Effect of Amine Mixing, Amine Degradation and Gas Flow Rate.

- ARIANA, 2010. Fouling effect of degradation products images retived on 12 june, 2010. Available at the website <http://blog.unsri.ac.id/Chemeng%20Sai/opp/fouling-pada-heat-exchanger/mrdetail/972/>
- Aroonwilas, A. and Veawab, A. 2004. *Ind. Eng. Chem. Res.* **43**: 2228–32
- Axel Meisen, A. and Abdi, M.A. 2010. Amine Degradation: Problems, Review of Research Achievements, Recovery Techniques, retrieved on March,2010 at the website <http://www.ripi.ir/congress10/amine%20degradation.pdf>
- Bedella, S.A. 2009. Oxidative degradation mechanisms for amines in flue gas capture *Energy Procedia* **1**: 771-8
- Blauwhoff, P., M., M., Lauwhoff, Versteeg, G., F., and Vanswaaij, W., P., M., 1984. A Study on the reaction between CO₂ and alkanolamines in aqueous solutions *Chemical Engineering Science* **39**(2): 207-25
- Carlson, S., Canter, S. and Jenkins, J. 2001. Canadian Gas Treating Solvent Quality Control – Unique Challenges,
- Choy, E., T., and Meisen, A. 1980. Gas chromatographic detection of diethanolamine and its degradation products *Journal of Chromatography* **187**: 145-52
- Closmann, F. 2009. solvent degradation –MEA and MDEA/PZ blends systems, retrieved on december,2009, available at the website http://ena.chemeng.ntnu.no/TrondheimJointAbsorptionSeminar/Closmann_Trondheim_150609.pdf
- Closmann, F., Thu Nguyen, T. and Rochelle, G., T., 2009. MDEA/Piperazine as a solvent for CO₂ capture. *Energy Procedia* **1**: 1351-7
- CRC, 2010. Foaming behaviour during carbondioxide capture, retrieved on 6 August, 2010, available at the website http://www.co2crc.com.au/dls/factsheets/CO2CRC_FactSheets.pdf
- CTL, 2010. Form of corrosion retrieved on 5 july, 2010, available at the website http://corrosion.ksc.nasa.gov/corr_forms.htm
- Davis, J. and Gary Rochelle, G. 2009. Thermal degradation of monoethanolamine at stripper conditions *Energy Procedia* **1** GHGT-9. 327-33
- Davis, J.D. 2009. Thermal Degradation of Aqueous Amines Used for Carbon Dioxide Capture, PhD thesis, *The University of Texas at Austin*.
- Dawodu, O., F., and A. Meisen, A. 1996. Effect of composition on the performance of alkanolamines blends for gas sweetening. *Chemical engineering communications* **144**: 103-12
- Dawodu, O., F., and Meisen, A. 1991. Identification of products resulting from carbonyl sulphide-induced degradation of diethanolamine *Journal of Chromatography* **587**: 237-46
- Dawodu, O., F., and Meisen, A. 1992. The effects of operating conditions on COS-induced degradation of aqueous diethanolamine solutions *Gas Separation & Purification* **6** (3): 115-24
- Dawodu, O., F., and Meisen, A. 1993. Gas chromatographic analysis of alkanolamine solutions using capillary and packed columns *Journal of Chromatography* **629**: 297-307
- Dawodu, O., F., and Meisen, A. 1996. Degradation of aqueous diethanolamine solutions by carbon disulfide *Gas. Sep. Purif* **10** (1): 1-11
- Dawodu, O.F. and Axel Meisen, A. 1994. Mechanism and kinetics of COS-induced diethanolamine degradation, *Ind. Eng. Chem. Res* **33**: 480-7
- Dupart, M.S., Rooney, P.C. and Bacon, T.R. 1999. Comparing laboratory and plant data for MDEA/DEA blends.
- Eide-Haugmo, I., Brakstad, O., G., Hoff, K., A., Sørheim, K., R., Silva, E., F., D., and Svendsen, H., F., 2009. Environmental impact of amines *GHGT-9* **1**: 1297-304
- Franco, J., A., Montigny, D., Kentisha, S., E., Perera, J., M., and Stevens, G., W., 2009. Effect of amine degradation products on the membrane gas absorption process *Chemical Engineering Science* **64**: 4016 – 23.
- Freeman, S.A., Davis, J. and Rochelle, G., T., 2010. Degradation of aqueous piperazine in carbon dioxide capture *International Journal of Greenhouse Gas Control*
- Goff, G., S., and Rochelle, G., T., 2006. Oxidation Inhibitors for Copper and Iron Catalyzed Degradation of Monoethanolamine in CO₂ Capture Processes. *Ind. Eng. Chem. Res.* **45**: 2513-21.

- Goff, G.S., and Rochelle, G.T., 2004. Monoethanolamine Degradation: O₂ Mass Transfer Effects under CO₂ Capture Conditions *Ind. Eng. Chem. Res.* **43**: 6400-8
- Haws, R. 2010. Contaminants in Amine Gas Treating Retrieved on 13 July 2010
- Haws, R. and Jenkins, J. 2000. Contaminant Reporting in Amine Gas Treating Service,
- Internet, 2009. Microfouling effect, retrieved on 21 March, 2010 available at the website <http://www.google.com.my/images?hl=en&q=fouling%20effect&um=1&ie=UTF-8&source=og&sa=N&tab=wi>
- Internet, 2010a. Microfouling effect, retrieved on 21 March, 2010 available at the website <http://www.google.com.my/images?hl=en&q=fouling%20effect&um=1&ie=UTF-8&source=og&sa=N&tab=wi>
- Internet, 2010b. Pitting corrosion, retrieved on 12 August, 2010, available at the website <http://www.google.com.my/images?q=pitting+corrosion&um=1&hl=en&tbs=isch:1&ei=VjINTPbLJMG7rAfN9KW5Dg&sa=N&start=60&ndsp=20>
- Kennard M. and Axel Meisen, A. 1983. Gas chromatographic technique for analyzing partially degraded diethanolamine solutions *Journal of Chromatography* **267**: 373-80
- Klare, M., Scheen, J., Vogelsang, K., Jacobs, H. and Broekaert, J., A.C., 2000. Degradation of short-chain alkyl- and alkanolamines by TiO₂- and Pt/TiO₂-assisted photocatalysis *Chemosphere* **41**: 353-62
- Lawal, O., Bello, A. and Idem, R. 2005a. Pathways and reaction products for the oxidative degradation of CO₂ loaded and concentrated aqueous MEA and MEA/MDEA mixtures during CO₂ absorption from flue gases, *GGCT-7*: 1159-64
- Lawal, O., Bello, A. and Idem, R. 2005b. The Role of Methyl Diethanolamine (MDEA) in Preventing the Oxidative Degradation of CO₂ Loaded and Concentrated Aqueous Monoethanolamine (MEA)-MDEA Blends during CO₂ Absorption from Flue Gases *Ind. Eng. Chem. Res.* **44**: 1874-96
- Lawal, O.A. and Idem, R.O. 2006. Kinetics of the oxidative degradation of CO₂ loaded and concentrated aqueous MEA-MDEA blends during CO₂ absorption from flue gas streams, *Ind. Eng. Chem. Res.*, **45**: 2601 -7
- Lensen, R. 2004. The promoter effect of piperazine on the removal of carbon dioxide
- Lepaumier, H., D. Picq, D. and Carrette, P., L., 2009a. Degradation Study of new solvents for CO₂ capture in post-combustion. *Energy Procedia* **1**: 893-900
- Lepaumier, H., Picq, D. and Carrette, P.-L. 2009b. New Amines for CO₂ Capture. I. Mechanisms of Amine Degradation in the Presence of CO₂. *Ind. Eng. Chem. Res.* **48**: 9061-7
- Lepaumier, H., Picq, D. and Carrette, P.-L. 2009c. New Amines for CO₂ Capture. II. Oxidative Degradation Mechanisms *Ind. Eng. Chem. Res.* **48**: 9068-75
- Lepaumiera, H., D. Picqa, D. and Carretteb, P., L., 2009. Degradation Study of new solvents for CO₂ capture in post-combustion. *Energy Procedia* **1**: 893-900
- Mandal, B.P., Guha, M., Biswas, A.K. and Bandyopadhyay, S.S. 2001. *Chem. Eng. Sci.* **56**: 6217-24
- Meisen, A. 1996. Degraded Amine Solutions: Nature, Problems and Distillative Reclamation, Proceedings of the 1996 Laurance Reid Gas Conditioning Conference.
- Meisen, A. and Abdi, M.A. 2010. Amine Degradation: Problems, Review of Research Achievements, Recovery Techniques, retrieved on March, 2010 at the website <http://www.ripi.ir/congress10/amine%20degradation.pdf>
- Oh, K.J., Lee, S.S., Park, S.W., Park, D.W. and Shon, B.H. 2003. Degradation of aqueous alkanolamine solution containing CO₂ and H₂S **48**(1): 258-9
- Pacheco, M.A., Kaganoi, S. and Rochelle, G.T. 2000. *Chem. Eng. Sci.* **55**: 5125-40
- Pauley, C.R. and Reza Hashemi, R. 1998. Analysis of Foaming Mechanisms in Amine Plants,
- Rinker, E.B. 1997. PhD Dissertation, University of California, Santa Barbara, USA, 1997.
- Sexton, A., J., and Rochelle, G., T., 2009. Catalysts and inhibitors for oxidative degradation of monoethanolamine, *International Journal of Greenhouse Gas Control* **3**: 704-11
- Sexton, A. and Rochelle, G.T. 2010. Oxidation products of amines in CO₂ capture, Retrieved on 10 May, 2010, available at the website http://www.che.utexas.edu/rochelle_group/Pubs/Pubs/SextonGHGT8.pdf
- Shahi, P., Hu, Y. and Chakma, A. 1994. Gas chromatographic analysis of acid gases and single/mixed

alkanolamines *Journal of Chromatography A* **687**: 121-32

Strazisar, B.R., Anderson, R.R. and White, C.M. 2003. Degradation Pathways for Monoethanolamine in a CO₂ Capture Facility *Energy & Fuels* **17**(2): 1034-9

Strazisar, B.R., Anderson, R.R. and White, C.M. 2010. Degradation of Monoethanolamine Used in Carbon Dioxide Capture from Flue Gas of a Coal-fired Electric Power Generating Station, retrieved on 8 May, 2010, at the website

http://www.netl.doe.gov/publications/proceedings/01/carbon_seq/4b3.pdf

Supap, T., Idem, R., Tontiwachwuthikul, P. and Saiwan, C. 2006. Analysis of Monoethanolamine and Its Oxidative Degradation Products during CO₂ Absorption from Flue Gases: A Comparative Study of GC-MS, HPLC-RID, and CE-DAD Analytical Techniques and Possible Optimum Combinations *Ind. Eng. Chem. Res* **45**: 2437-51

Thitakamol, B. and Veawab, A. 2008. Foaming Behavior in CO₂ Absorption Process Using Aqueous Solutions of Single and Blended Alkanolamines *Ind. Eng. Chem. Res* **47**: 216-25

Thitakamol, B., Veawab, A. and Aroonwilas, A. 2009. Foaming in amine-based CO₂ capture process: experiment, modeling and simulation. *Energy* **9**: 1381-6.

Weiland, R.H., Sivasubramanian, M.S. and Dingman, J.C. 2003. The 53rd Annual Laurence Reid Gas Condition Conference, Norman, OK, 24 February 2003

Xia, J., Kamps, A.P.S. and Maurer, G. 2003. *Fluid Phase Equilib.* **207**: 23-34